

# ESKA™ Plastic Fiber Optic & Cable Wiring


Manufactured by Mitsubishi Rayon Co., Ltd.

Marketed and sold by Mitsubishi International PolymerTrade Corporation

## Wiring

### Handling Around Connectors

In terminating with connectors the bending of the cable immediately after the connector should be avoided as this may cause attenuation increase. It is recommended that the cable be kept straight for 5 cm (2 inches) in length after the connector, then bend it within the specified radius that is greater than 20 times that of the fiber.

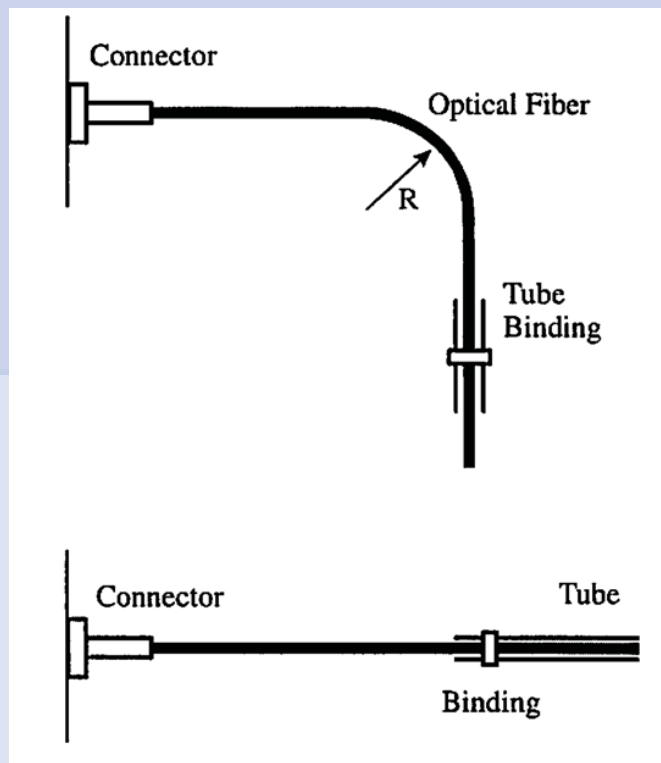

### Wiring with Connectors

The information contained herein is presented as a guide to product selection. It is subject to change without notice, and should not be regarded as a representation, warranty or guarantee with regard to the quality, characteristics or use of this product.